



# Athlegen Treatment 680 -

## CODE - QAT3P



The Athlegen Treatment 680 is suitable for a wide range of modalities, including massage, osteopathy, beauty treatments and examinations. The three section configuration features a shorter backrest (680mm) and a longer seat section than the Treatment 930 model. This configuration is better suited to modalities that need to treat clients in a seated position but require extra leg room. The adjustable head section includes a face recess and can be slightly lowered enabling the prone patient to fully relax the neck muscles giving optimum comfort - ideal for massage treatments.

Optional face cradle extensions with armrests can also be fitted. The sturdy design helps to optimize your performance whilst achieving maximum comfort and support for your clients. Combine this with quiet height adjustment and you have discovered just a few reasons why this could be the perfect table for your practice.

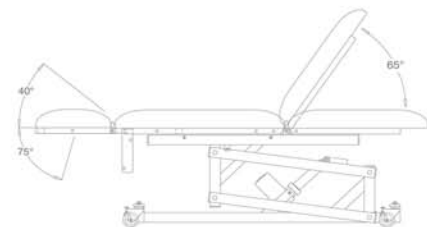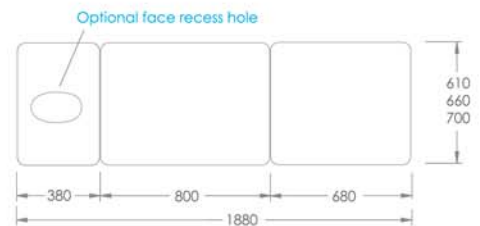

### features

- Electric power height adjustment system is driven by a commercial grade linear actuator made in Germany ensuring fast, reliable and vibration free performance.
- Adjustable sections feature twin stainless steel control arms which provide extra security, support and rigidity.
- 8 pivot lifting arm mechanism, super strong with self lubricating nylon bushes to ensure smooth and quiet operation.
- Upholstery construction feature high quality Australian made cfc free foam rubbers.
- High quality protective coated vinyl with oil resistant properties; durable with a soft and comfortable feel.
- Choice of table top widths and cushioning constructions so you can customise the treatment area to best suit your needs.
- Heavy duty, industrial quality lockable castors with a chrome housing, steel bearings and a rubber wheel tread.
- Durable powder coated rust resistant frame.
- Heavy duty stainless steel footswitch
- Built to last with very low maintenance.

### specifications

#### Maneuverability

360° rotation, heavy duty industrial quality lockable casters.

#### Covering

PVC tested to AS 1441.11, AS 1530.3, AS 4088.1

#### Cushioning

CFC free, polyurethane foam

#### Frame

Powder coated, rust resistant steel frame

#### Maximum working height

970mm (with Standard cushioning)

#### Minimum working height

450mm (with Standard cushioning)

#### Maximum working load

175kg

#### Power requirements

240 VAC @ 3.4 AMPS

#### Table Length

1880mm

#### Shipping dimensions

1900mm x 800mm x 800mm

#### Shipping weight

125kg

#### Warranty

Australia 5 years structural and 3 years motor. Extended warranty available. Other countries upon request.